


CEIBRIT

# Natural Slate

Glendyne

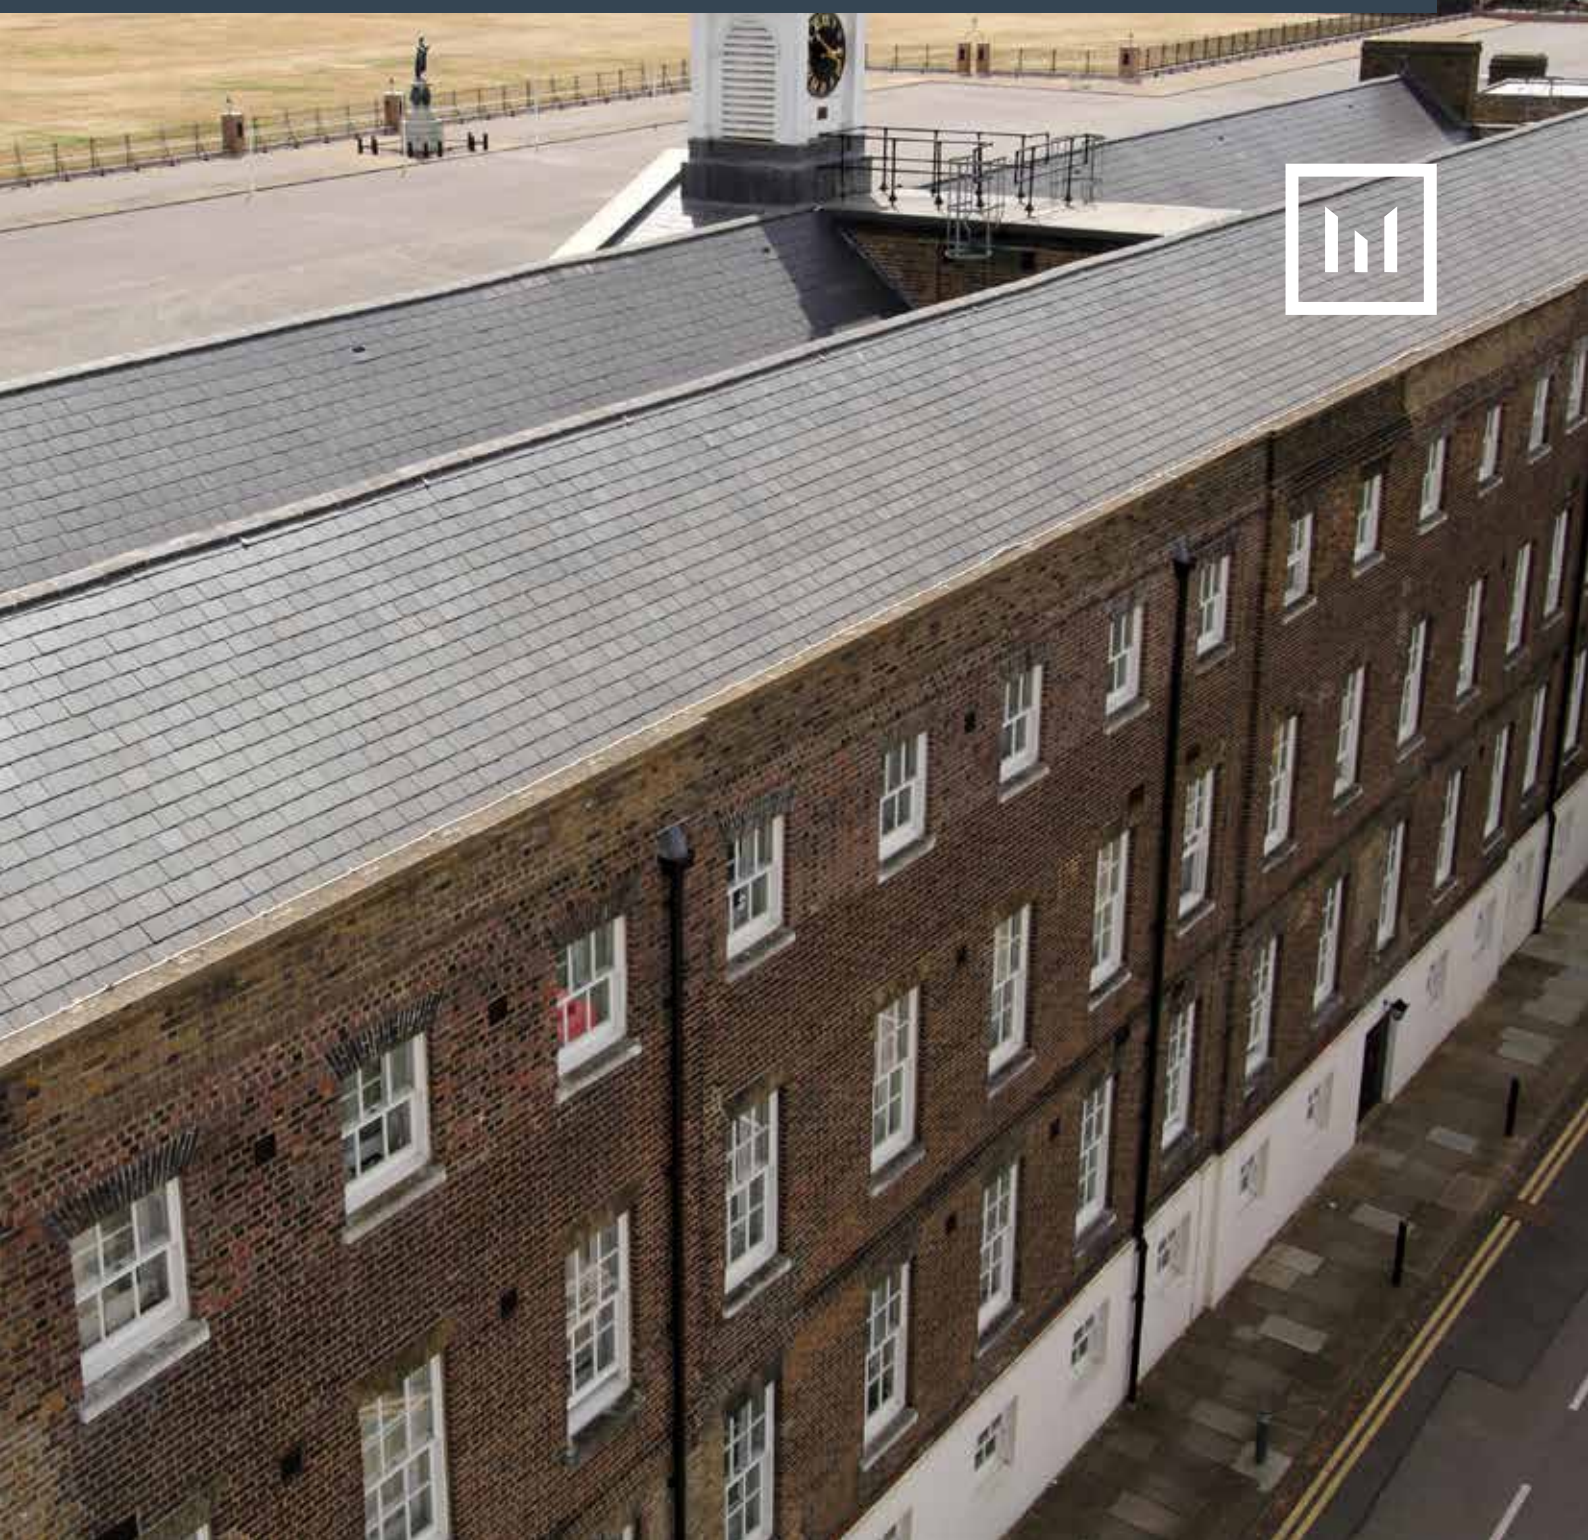

# Glendyne



## Glendyne - Cembrit's leading natural slate brand

Glendyne is classified as W1, T1 S1 to BS EN 12326-1:2014 Slate and stone for discontinuous roofing and external cladding. Specifications for slate and carbonate slate.

Commercial quarrying of Glendyne commenced in the 1990's and since then Cembrit and Glendyne have developed a long standing relationship. Cembrit's experience in natural slate supported Glendyne with industry know-how and early commitment to offer insight in what would be required from a top quality natural slate. Glendyne repaid this with formats designed for the UK market and exclusivity. Glendyne is only available in the UK from Cembrit Ltd.

## Glendyne - High yields lead to competitive pricing

The area where Glendyne is quarried offers advantages over longer standing sources. The relatively easily accessible rock means that yields are higher and output is more consistent than in most other slate regions.


Being a relatively new source Glendyne can take advantage of the latest technologies whilst applying the most successful traditions and expertise from established slate regions. Glendyne is sold to the world's discerning slate markets. Some markets, notably France and Belgium still retain special requirements. Glendyne exceeds all the requirements of these additional standards.

Description	Pre-holed natural slate with consistent high quality physical characteristics including strength, with no oxidation risk.			
Appearance	Blue grey colour with consistent fine surface texture			
Thickness mm	4-5	5-6	5-6	4-6
Dimensions mm	508x254	508x254	508x305	610x305
Typical quantity per crate	850	750	730	600
Average weight per slate Kg	1.60	1.60	1.90	2.25
Approx weight per crate Kg	1357	1197	1390	1350
Slates per m <sup>2</sup>	19.20	19.20	16.81	12.81
Weight Kg per m <sup>2</sup> *	29.17	29.17	31.94	28.82
Accreditation	BS EN 12326, NF 228-LO3, ASTM C404-06, Belgian STS			
Minimum roof pitch				
Moderately exposed location	25**	25°	20*/25**	25°
Severely exposed location	30**	30°	22.5°	30°

\* at 30 degree pitch and 77mm headlap \*\*at 118mm head lap \*\*\*at 98mm head lap



Glendyne could well be the most approved slate currently available in Europe, with certification to the relevant British Standard European Norm and the stringent Belgian ATG H768. Glendyne also has a pass classification for the French NF228 Norm and a pass classification for the American ASTM C406 class S1 which means the life expectancy is in excess of 75 years.

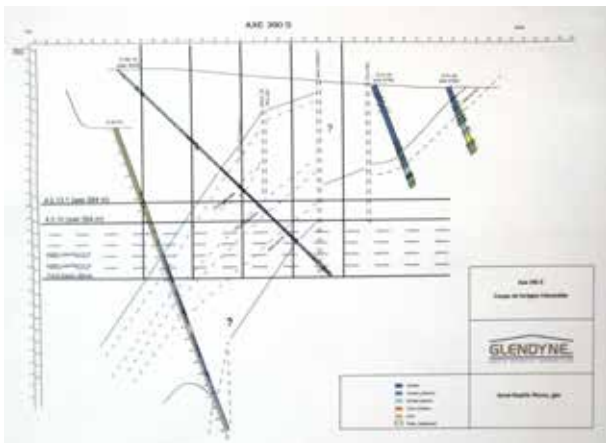

### Glendyne - Investment in quality control means highly efficient production

Glendyne place great emphasis on geological surveying, testing and analysis to identify the most economical strata before extraction even commences.



Wire cut blocks, up to 5 tonnes in weight, are carefully removed and inspected by "Markers" specially trained experts, who identify where the extracted blocks should be sawn and what the ultimate, optimised slate dimension will be. This stage is not common in other slate producing regions.

Following primary and secondary sawing the slabs are sent to the "craftsmen," the splitters whose judgement and dexterity is employed to assess each split by feel and sight optimising slate yield. Slates are bevelled, holed if necessary and then inspected and graded for thickness, surface texture and flatness before being packed into pallets for shipment.



Quality assurance checks are undertaken on crated slates prior to despatch.



### Emphasis on quality control

The focus on quality management, application of the latest techniques and an experienced workforce, where approximately 1/3 are involved in sorting and quality checking, creates a top-quality product. Cembrit is proud to state that Glendyne is only available in first quality grade.

The result is a regular, high performing roof slate, popular with slaters. Glendyne is comparable with the best renowned natural slates available in the UK. Tightly controlled production giving a consistent thickness means your finished roof will be uniform, neat and authentic. Glendyne is suitable for the most demanding specifications at a reasonable price!



# Natural slate for roofing

The unique qualities of rock created over millions of years by intense compression and heat make slate an ideal roof covering. Able to be split into regular thin layers, with built in rain, light, chemical and weather resistance, good quality slate will protect your property for a lifetime.



The rich variety of textures, shades, colours and formats gives you the choice to personalise your building, whilst adding a look of traditional permanence to the finished project.



## Environmentally friendly roof covering

The raw material is quarried rock cut into blocks, energy input is low. The blocks are then split into slates, usually by hand. No high energy processing of raw materials occurs in slate production unlike concrete, clay, cement based or metallic roof-coverings. Good quality natural slate will last 100-150 years. Any energy absorbed in production is dispersed over a long working life. The best quality natural slate is often salvaged and re-used extending its life still further!



## Grading and sorting

One of the attractions of authentic slate is the randomness of the natural stone. Every slate is unique, so to get the best finished appearance natural slates should be sorted into batches of equal thickness, by the slater, before installation. That will ensure a neat, regular, flat roofslope.

# CEMBRIT

Building Better Days

## Regional Depots

- 1 North T +44 (0)1924 890890
- 2 Wales T +44 (0)1446 773777
- 3 Central T +44 (0)1189 586217

[sales@cembrit.co.uk](mailto:sales@cembrit.co.uk)

[customerservices@cembrit.co.uk](mailto:customerservices@cembrit.co.uk)



Cembrit Ltd  
Studio 39, Thames Innovation Centre, 2 Veridion Way, Erith, Kent DA18 4AL  
[info@cembrit.co.uk](mailto:info@cembrit.co.uk)  
[www.cembrit.co.uk](http://www.cembrit.co.uk)

## Accreditations



### Product compliance

All cembrit slates comply with Construction Products Regulations and the corresponding declared performance.

nbsPlus



### Specification support

Specifications are available in text and BIM format for various Cembrit slates within these nationally recognised platforms.



### Design detailing support

DWG and PDF detail drawings are available for various Cembrit slates.

Approved for use in  
Snowdonia National  
Park



### Natural slate specification

Cembrit Glendyne natural slates comply with the requirements of BS EN 12326-1:2014.